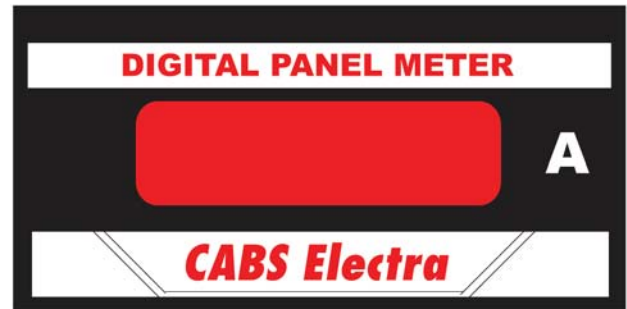
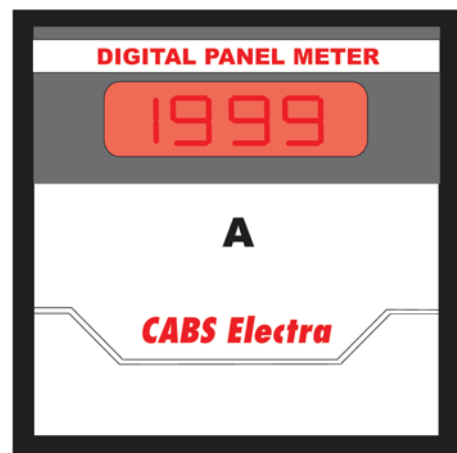


FEATURES**Two Years Warranty**

- Display 3-½ 'OR' 4-½ digits (Any One) LED (Red)
- Accuracy +/- 0.5% of FS
- Range 0-1Amps & 0-5Amps A.C. (Any One)
- Available for various CT ratios
- Programmable meters with CT Primary 1600A to 100A and 160.0A to 10.00A are also available
- Depth 105mm
- Mounting: Flush

**FEATURES OF 3 1/2 DIGIT METER**

Accuracy	ACA 0.5% Rdg +/- 3 Dgts DCA 0.3% Rdg +/- 2 Dgts
Dimension	96 mm x 96 mm (Bezel) 72 mm x 72 mm Special Adaptors to convert 96 x 96 mm sq size meters to 144 x 144 mm sq size meters are also available upon request

**FEATURES OF 4 1/2 DIGIT METER**

4 1/2 Display	
Accuracy	ACA 0.5% Rdg +/- 3 Dgts DCA 0.3% Rdg +/- 2 Dgts
Dimension	96 mm x 96 mm (Bezel) Special Adaptors to convert 96 x 96 mm sq size meters to 144 x 144 mm sq size meters are also available upon request

SPECIFICATIONS

Display	14/12 mm H, Red Led
Sampling time	Abt. 0.4 Sec typically
Frequency Range	45-400 Hz for AC range
Over Range Indication	"1"
Polarity	only "-" Display
Aux supply source	230V/110V/50/60Hz 'OR' 24 - 110V DC (Any One)
Power Consumption	AC 5VA
Operating temperature range	0 ~ 50°C
Storage temperature range	10 ~ 70°C
Max relative humidity	95%
Dielectric strength	AC 2KV/1Min

Note: T-RMS versions and meters with Data Hold Functions also available upon request.

*Technical Specifications & Appearance are subject to change without prior notice