
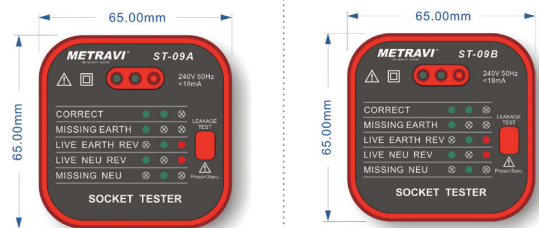


**INTRODUCTION:**

- A Very Simple Instrument to use
- Plug this tester into the socket and find out the problems in connections, if any.

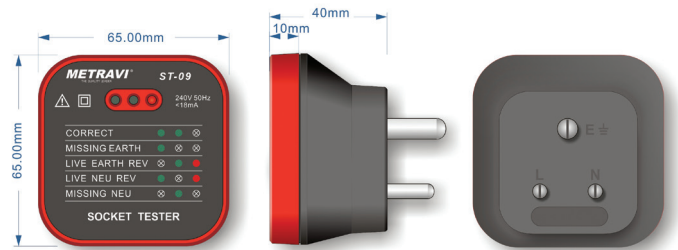

**SPECIFICATIONS:**

- Operating Range AC 230V (±10%), 50Hz ~ 60Hz

ST-09/09A/09B Series Socket Tester						
	GREEN	GREEN	RED	ST-09	ST-09A	ST-09B
Correct	●	●	○	✓	✓	✓
Missing Earth	●	○	○	✓	✓	✓
Live Earth Rev	○	●	●	✓	✓	✓
Live New Rev	●	○	●	✓	✓	✓
Missing New	○	●	○	✓	✓	✓
Live Earth Rev and Miss Earth	●	●	●	✗	✗	✗
Socket Rated Voltage	250VCA			✓	✓	✓
Socket Rated Current				10A	13A	10A
Leakage Test (Press time <3s)	About 30mA			✗	✗	✓
Double Insulated				✗	✓	✗
CE				✓	✓	✓
: SAA				✓	✗	✓
Pollution Degree	2			✓	✓	✓
Operating Temperature	0°C ~ 40°C			✓	✓	✓
Storage	-10°C ~ 50°C			✓	✓	✓
Humidity	<75%			✓	✓	✓
Altitude	2000m			✓	✓	✓
This Unit Will not Detect Earth Neutral Reverse				✓	✓	✓
Do not discard this product as an unclassified municipal waste, but put it into a fixed cell recycle bin for disposal.				✓	✓	✓

\*Technical Specifications & Appearance are subject to change without prior notice